



Since 1986

The Refrigeration Company

Product Catalogue

CELEBRATING
33
YEARS
ESTABLISHED IN 1986



PIONEERING A GREENER TOMORROW

PROGRESSIVE | PROFITABLE | PARTNERSHIP



Less Power Consumption



90 mm PUF



10 Years Warranty
on body

www.rockwell.co.in



Authorised Franchisee



Head Office : Plot No. 10, Trimurti Nagar, PAC-Eidgah Road, Jwalapur, Haridwar – 249 407, Uttarakhand
Branch Office : 72/59, Aaraghar, Near Panchayati Mandir, Race Course Road, Dehradun 248 001, Uttarakhand
Phone : 9997977002 (MD) | 9870967878 (Sales - HDR) | | 8077246641 (Sales - D.Dun) | 9411566696 (Customer Care)
Website : www.prakashenterprises.info | Email : md@prakashenterprises.info | info@prakashenterprises.info

Green Freezer Cum Cooler

CONVERTI

100% COPPER COOLING COIL

HEAVY DUTY CONVERTI FREEZER

53% Less Power Consumption
upto 50% Higher Holdover

Less Power Consumption

Higher Holdover

90 mm PUF

5 Years Warranty On Compressor

100% Copper Evaporator with 10 years body* warranty and 5 years compressor** warranty.



GFR250-U



GFR350-U



GFR450-U



GFR550-U

Model	Capacity	No of Basket	Height mm	Width mm	Depth mm	Temp Range	Doors	Insulation	Refrigerant	Voltage
GFR-250	209	1	900	850	735	+8 °C to -23 °C	1	90 mm High Density PUF CFC Free	R - 134a	Single Phase 190 - 254V, AC, 50 Hz
GFR-350	315	1	900	1145	735		1			
GFR-450	416	1	900	1425	735		2			
GFR-550	523	2	900	1720	735		2			

Curved Glass Green Freezers with LED

upto 50% Higher holdover

Super Tropicalised

upto 53% Less power consumption

Ultimate Product Display



GFR ICGT250



GFR ICGT350



GFR ICGT450



GFR ICGT550

Model	Capacity (Ltrs)	No of Baskets	Height mm	Width mm	Depth mm	Temp Range	Doors	Insulation	Refrigerant	Voltage
GFR-250 ICGT	210	2	912	850	680	-18°C to -23°C	Sliding	90 mm High Density PUF CFC Free	R - 134a	Single Phase 190 - 254V, AC, 50 Hz
GFR-350 ICGT	318	3	912	1145	680		Sliding			
GFR-450 ICGT	420	4	912	1425	680		Sliding			
GFR-550 ICGT	527	4	912	1720	680		Sliding			

*Body warranty applicable for Evaporator /Cooling Coil/Leak.Normal wear & tear or physical damage not covered in warranty.
**5 Years warranty on compressor only for GFR service charges extra.



Up to
24 Hours
Holdover!!

Eutectic Freezers

Keeps Fresh & Frozen in spite of long power cuts



GFR-250 ET

GFR-350 ET

GFR-450 ET

GFR-550 ET

Model	Capacity	No. of Baskets	Dimensions (HxWxD) mm	Temperature Range	Doors	Insulation	Refrigerant	Voltage
GFR250 ET	209	1	900x850x735	-18°C to -23°C	1	90mm High Density PUF CFC Free	R-134a	Single Phase 190-254V, AC, 50 Hz
GFR350 ET	315	1	900x1145x735		1			
GFR450 ET	416	1	900x1425x735		2			
GFR550 ET	523	2	900x1720x735		2			

FREEZER ON WHEELS



FRTK 120

FRTK 200

FOW 450

Model	Dimensions (HxWxD) mm	Temperature Range	Doors	Refrigerant	Insulation	Voltage
FRTK 120	810X935X635	-18°C to -30°C	1	R-134a	90mm High Density PUF CFC Free	Single Phase 190-254V, AC, 50 Hz
FRTK 200	885X935X635	-18°C to -36°C	2	R-404a		
FOW-450	975X1425X685					



Best holdover in its class



Specially Designed Compressor for MOBILE Application




Quick pull down

Hard Top and Glass Top Freezers



Corrosion resistant body made of Pre Painted GPSP Sheet



Super tropicalised to perform in extreme temperatures



Sleek Recessed Handle



3 Side Air Circulation For Better Heat Transfer



Patented Noise Free Hinges

Model	Capacity	No. of Baskets	Dimensions (HxWxD) mm	Doors	Temperature Range	Insulation	Refrigerant	Voltage
SFR110	101	1	845x515x550	1	-18°C to +8°C	60 mm High Density PUF CFC Free	R-134a	Single Phase 190-254V, AC, 50 Hz
SFR150	115	1	888x627x583	1	-18°C to -23°C			
SFR210	180	1	826x860x565	1	-18°C to +8°C			
SFR250	236	1	940x832x666	1	-18°C to -23°C			
SFR350	346	1	940x1120x666	1/2				
SFR450	453	1	940x1402x666	2				
SFR550	563	1	940x1692x666	2				
SFR250 GT	236	1	895x832x624	SLIDING				
SFR350 GT	346	2	895x1120x624	SLIDING				
SFR450 GT	453	2	895x1402x624	SLIDING				

Hard Top Milk Coolers



Model	Capacity	No. of Baskets	Dimensions (HxWxD) mm	Doors	Temperature Range	Insulation	Refrigerant	Voltage
SC-150	115	1	888x627x583	1	+2°C to +8°C	60mm High Density PUF CFC Free	R-134a	Single Phase 190-254V, AC, 50 Hz
SC-250	236	1	940x832x666	1				
SC-350	346	1	940x1120x666	1/2				
SC-450	453	1	940x1402x666	2				
SC-550	563	2	940x1692x666	2				

Combi Freezer & Cooler



Efficient space management.
Multi purpose usage
(freezer/cooler)



Separate compartment access
(freezer compartment &
cooler compartment)




High energy efficiency
compressor



Soft look & robust design



Corrosion resistant body

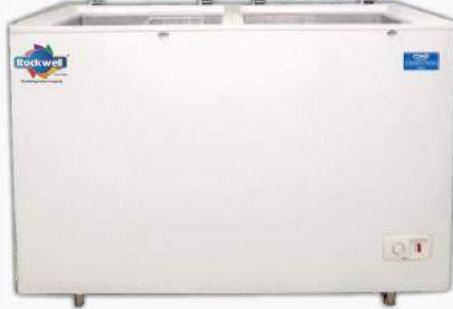

Combi Freezer & Cooler	Combi 300	Combi 400	Combi 500
Total Capacity	287	371	490
Freezer Capacity	189	164	308
Cooler Capacity	98	207	151
Freezer Temperature Range	<-18°C	<-18°C	<-18°C
Cooler Temperature Range	+2°C to +10°C	+2°C to +10°C	+2°C to +10°C
Separate Compartments	YES	YES	YES
Refrigerant	R134A	R134A	R134A
Dimensions (WxDXH)mm	1200x602x866	1309x692x924	1535x757x920
Insulation	High Density PUF	High Density PUF	High Density PUF
Voltage	Single Phase 190-254V, AC, 50Hz	Single Phase 190-254V, AC, 50Hz	Single Phase 190-254V, AC, 50Hz

Insta Chill Heavy Duty Chillers



PC 9



PC 21 DD



IC 777



IC 888

Model	Storage Capacity			Length mm	Breadth mm	Height mm	No. of Doors	Insulation	Temperature Range	Refrigerant	Voltage
	200 ml	300 ml	650 ml								
IC 220 SD / PC 9 SD	220	151	83	585	630	940	1	PUF CFC FREE	+2°C to +8°C	R 134a	Single Phase 190-254 VAC 50 Hz
IC 510 SD / PC 21SD	510	350	201	1063	630	940	1				
IC 510 DD / PC 21DD	510	350	201	1063	630	940	2				
IC-777	777	432	288	1400	665	940	3				
IC-888	-	486	345	1690	665	940	3				



Heavy Duty Compressor



Fastest pull down time*



New Range of Visi Coolers

More Visibility. More Profits



RVC50 RVC200A RVC240B RVC300A RVC390A RVC550A RVC580A RVC700A RVC1100A

Model	Dimensions (WxDxH) mm	Capacity Liters	Temperature Range	Refrigerant	Insulation	Voltage
RVC50	400x415x733	45 Ltrs	+2°C to +8°C	R134A	High Density PUF	Single Phase, 190-254V, 50 Hz
RVC200A	545x620x1340	164 Ltrs				
RVC240B	630x575x1655	180 Ltrs				
RVC300A	530x635x1645	220 Ltrs				
RVC390A	620x635x1765	300 Ltrs				
RVC550A	620x690x2079	430 Ltrs				
RVC580A	900x630x1865	420 Ltrs				
RVC700A	690x730x2036	530 Ltrs				
RVC1100A	1200x730x2036	1000 Ltrs				



Heavy Duty High Efficiency Compressor



Back Lit Canopy for Excellent Branding

Visi Freezer & Counter Top Visi Freezer



VF400



VF50

MODEL	VF50	VF170	VF400
Dimensions (WxDxH) mm	400x415x733 cm	420x480x1875 mm	640x668x2057 mm
Temperature Range	<-18°C	-18°C	-18°C to -22°C
Refrigerant	R134a	R404a	R404a
Insulation	High Density PUF	High Density PUF	High Density PUF
Voltage	110V/60Hz, 220V-240V/50Hz	110V/60Hz, 220V-240V/50Hz	Single Phase 190-254V, 50Hz

HOT / NORMAL / COLD

3 IN 1

Water Dispensers



Quick Customer Service



23 % Extra Storage *



Model	Xtra Pure Mini	Xtra Pure R	Xtra Pure N	Pure Normal & Cold
Type	Table Top	Floor Mounted	Floor Mounted	Floor Mounted
Cabinet type	No Cabinet	Cooling Cabinet	No Cabinet	No Cabinet
No of Faucets	Three	Three	Three	Two
Power Supply	230v/1Ph	230v/1Ph	230v/1Ph	230v/1Ph
Cold Water Storage capacity	3.7 Ltr	3.7 Ltr	3.7 Ltr	3 Ltr
Cooling capacity	3 Ltr/Hr	3 Ltr/Hr	3 Ltr/Hr	3 Ltr/Hr
Unit Dimension (HxWxD) mm	530x315x350 mm	1010x315x350 mm	1010x315x350 mm	975x315x350 mm
Refrigerator compartment	No	Yes	No	No
No. of Taps	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Normal & Cold



Rockwell Water Coolers

We help quench thirst better!



RWCS20/40



RWCS40/80



RWCS60/120



RWCS150/150

Model	Storage Capacity (Litres)	Nominal Cooling Capacity* (Litres/hr)	No. of Faucets	Dimensions (mm)			Weight (kg)	Normal Demand** (glasses per hr.)	Refrigerant	Current (Amps)	Water Over Flow (Connections)
				Width	Depth	Height					
RWCS2040	20	40	1	370	370	1185	35	100	R-134a	2	Provided
RWCS4080	80	40	2	590	490	1200	48	200	R-134a	2.5	Provided
RWCS60120	120	60	2	700	540	1160	55	300	R-134a	3.6	Provided
RWCS150150	150	150	2	700	540	1320	70	750	R-134a	7.5	Provided

High Capacity Deep Freezer

**10kg curd buckets
22 Nos. Storage**



Best suitable for storage of frozen foods & ice creams

LGFR810

FEATURES

53%
Less Power Consumption

upto 50%
Higher Holdover

Super Tropicalised

Faster Cooling

CONVERTI
Converti Feature based on Cooling Requirement

Model	Capacity Ltrs.	Temp. Range	Dimensions W*D*H (mm)	Refrigerant	Doors	No. of Baskets	Insulation	Voltage
LGFR810	750 Ltrs.	-27°C to +8°C	1947x797x825	R290a	3	1	75mm High Density PUF CFC Free	Single Phase 190-254V, AC, 50Hz

Trouble Free Machine TFR 550U



Model	Capacity	No. of Baskets	Dimensions (HxWxD) mm	Temperature Range	Doors	Insulation	Voltage
TFR550U	523	2	900X1720X735	+8°C to -23°C	2	90mm High Density PUF CFC Free	Single Phase 110-280V AC, 50 Hz



Professional Kitchen Refrigeration

The Choice of International Chefs



PRODUCT	RGN650C2D RGN650F2D	RGN1450C4D RGN1450F4D	RGN2100C RGN2100F	RGN3100C RGN3100F
Outer Dimensions (WxDxH) mm	740x830x2010	740x830x2010	1480x830x2010	1480x830x2010
Net Capacity (Ltr.)	638	638	1276	1276
Cooling Capacity	Ventilated	Ventilated	Ventilated	Ventilated
Temperature Range	-2°to +10°C	-18°to -22°C	-2°to +10°C	-18°to -22°C
Shelves Nos.	3	3	6	6
Interior Light	LED light	LED light	LED light	LED light
Door Type	Solid	Solid	Solid	Solid
Refrigerant	R290a	R290a	R290a	R290a

Rockwell Ice Machine's Ice Pure and Simple



Model	Capacity kg/24hrs	Dimensions WxDxH	Ice Storage	Power	Weight
RICM40BW	40	500x450x890	15 kg	300w	40 kg
RICM60BW	60	500x590x890	18 kg	360w	50 kg
RICM100	100	660x685x920	36 kg	850w	67 kg
RICM235	235	760x830x1718	125 kg	1240w	110 kg
RICM330	330	760x830x1718	125 kg	1420 w	122 kg

Back Bar Coolers



Model:BB220



Model:BB340

Features and Benefits

- ▶ Fan assisted cooling
- ▶ Auto defrost
- ▶ Interior LED light with switch
- ▶ Adjustable feet
- ▶ Fan assisted condenser
- ▶ Digital controller and temperature display
- ▶ Replaceable door gasket
- ▶ Tempered glass
- ▶ Lock

MODEL NO	Gross Volume (ltr.)	External Dimension W×D×H(mm)	Net /Gross Weight (Kg)	Door
BB220	198	900×520×850	62/72	Hinge
BB340	320	1350×520×850	80/90	Hinge

Solar Cooler / Freezer

**ZERO ENERGY COST
FOR LIFE TIME**



Upto
3 days
Holdover!!

Model	Capacity (Ltrs)	No of Baskets	Dimension HxWxD (mm)	No of Doors	Solar Panel	Battery	Temp. Range	Insulation	Refrigerant	Voltage
DDSC-170 ET (Direct Drive)	170	1	900x914x735	1	200Wx2	NA	-16 °C to +6 °C	High Density 120 mm PUF	R 134a	12/24 V DC (+/- 10%)
FR-170	170	1	900x914x735	1	200Wx2	24V 150aH				
FR-240	240	2	900x1145x735	1	200Wx2	24V 150-190aH				

CELEBRATING

33
YEARS

of
REFRIGERATION
1986-2019



The Refrigeration Company



India's First IGBC Platinum Rated Company in CRA Industry
PREFERRED BY THE MOST PREFERRED BRANDS OF ICE CREAM AND BEVERAGE INDUSTRY

* 5 Years warranty on compressor only for GFR

Customer Care Number - 94115 66696
Email - info@prakashenterprises.info



Rockwell Industries Limited.

**Please visit www.prakashenterprises.info
for more information.**

**PE PRAKASH™
ENTERPRISES**

Authorised Franchisee

Head Office : Plot No. 10, Trimurti
Nagar, PAC-Eidgah Road, Jwalapur,
Haridwar – 249 407, Uttarakhand
Ph : 9997977002 | 8077246641 | 9870967878
Website: www.prakashenterprises.info

Branch Office

72/59, Aaraghar, Near Panchayati Mandir, Race Course Road, Dehradun 248 001, Uttarakhand
Phone : 9997977002 (MD) | 9870967878 (Sales - HDR) | 8077246641 (Sales - D.Dun)
Website : www.prakashenterprises.info | Email : md@prakashenterprises.info | info@prakashenterprises.info